SIEMENS

# Data sheet for SINAMICS Power Module PM330

**Article No. :** **6SL3310-1PE34-6AA0**



Figure similar

Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :

## Rated data

| | | |
|---|---|---|
| **Input** | | |
| Number of phases | 3 AC | |
| Line voltage | 380 ... 480 V ±10 % | |
| Line frequency | 47 ... 63 Hz | |
| Rated current (LO) | 459.00 A | |
| Rated current (HO) | 375.00 A | |
| **Output** | | |
| Number of phases | 3 AC | |
| **Rated voltage** | **400V IEC** | **480V NEC [1)]** |
| Rated power (LO) | 250.00 kW | 300.00 hp |
| Rated power (HO) | 200.00 kW | 200.00 hp |
| Rated current (LO) | 450.00 A | |
| Rated current (HO) | 368.00 A | |
| Max. output current | 608.00 A | |
| Pulse frequency | 2 kHz | |
| Output frequency for vector control | 0 ... 100 Hz | |
| Output frequency for V/f control | 0 ... 100 Hz | |
| **Overload capability** | | |
| Low Overload (LO) | | |
| 1.35 × base load current IL (i.e., 135 % overload) for 3 s or 1.1 × base load current IL (i.e., 110 % overload) for 60 s in a 300 s cycle time | | |
| High Overload (HO) | | |
| 1.5 × base load current IH (i.e., 150 % overload) for 60 s in a 300 s cycle time | | |

## General tech. specifications

| | |
|---|---|
| Power factor λ | 0.93 |
| Offset factor cos φ | 0.96 |
| Efficiency η | 0.98 |
| Sound pressure level (1m) | 71 dB |
| Power loss | 4.40 kW |
| Filter class (integrated) | - |

## Ambient conditions

| | |
|---|---|
| Cooling | Internal air cooling |
| Cooling air requirement | 0.210 m³/s (7.416 ft³/s) |
| Installation altitude | 1,000 m (3,280.84 ft) |
| **Ambient temperature** | |
| Operation LO | 0 ... 40 °C (32 ... 104 °F) |
| Operation HO | 0 ... 50 °C (32 ... 122 °F) |
| Transport | -25 ... 55 °C (-13 ... 131 °F) |
| Storage | -25 ... 55 °C (-13 ... 131 °F) |
| **Relative humidity** | |
| Max. operation | 95 % RH, condensation not permitted |

## Connections

| | |
|---|---|
| **Line side** | |
| Version | M12 screw |
| Conductor cross-section | 185.00 ... 2 x 240.00 mm² (AWG -5 ... MCM 2 x 500) |
| **Motor end** | |
| Version | M12 screw |
| Conductor cross-section | 150.00 ... 2 x 240.00 mm² (AWG -4 ... MCM 2 x 500) |
| **DC link (for braking resistor)** | |
| Version | M12 screw |
| Conductor cross-section | 150.00 ... 2 x 240.00 mm² (AWG -4 ... MCM 2 x 500) |
| PE connection | M12 screw |
| **Max. motor cable length** | |
| Shielded | 100 m (328.08 ft) |
| Unshielded | 200 m (656.17 ft) |

## Mechanical data

| | |
|---|---|
| Degree of protection | IP20 / UL open type |
| Frame size | GX |
| Net weight | 107.00 kg (235.89 lb) |
| **Dimensions** | |
| Width | 452 mm (17.80 in) |
| Height | 1,447 mm (56.97 in) |
| Depth | 327 mm (12.87 in) |

## Standards


| | |
|---|---|
| Compliance with standards | UL, cUL, CE, C-Tick (RCM), kc, GOST-R (EAC) |
| CE marking | Low-voltage directive 2006/95/EC |

SIEMENS

# Data sheet for SINAMICS Power Module PM330

**Article No. :** **6SL3310-1PE34-6AA0**

| Converter losses to IEC61800-9-2* | |
|---|---|
| Efficiency class | IE2 |
| Comparison with the reference converter (90% / 100%) | 37.60 % |

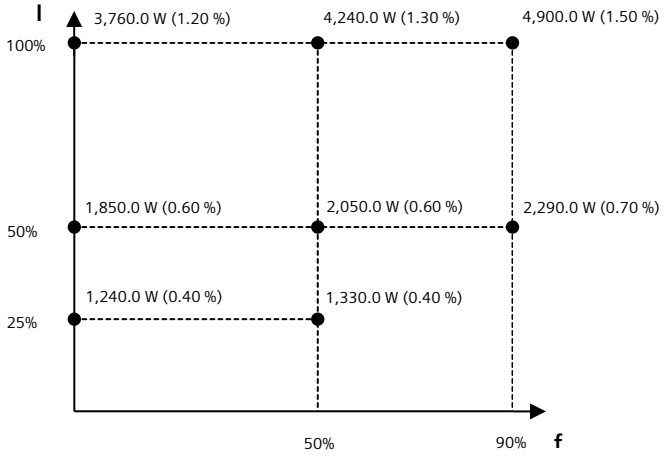


The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard IEC61800-9-2) of the relative torque generating current (I) over the relative motor stator frequency (f). The values are valid for the basic version of the converter without options/components.

*calculated values

[1] The output current and HP ratings are valid for the voltage range 440V-480V